

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/004246 A1

(51) International Patent Classification⁷: **H04L 12/56**

(21) International Application Number:
PCT/IB2002/002519

(22) International Filing Date: 1 July 2002 (01.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HARTWIG, Stephan** [DE/DE]; Ernst-Barlach-Strasse 13, 45276 Essen (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(74) Agent: **WAGNER, Bernhard, P.**; Patentanwälte ter Meer Steinmeister & Partner GbR, Association No. 6, Mauerkircherstrasse 45, 81679 München (DE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD FOR ESTABLISHING A CONNECTION BETWEEN A MOBILE DEVICE AND A SECOND DEVICE

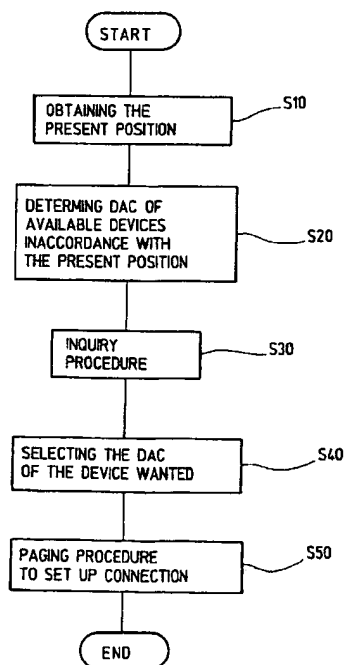

(57) Abstract: The present invention relates to a method for establishing a connection from a mobile device (10) to a second device (20) both provided with a short range wireless communications module (11, 21). To reduce the set-up time for establishing such a connection significantly the method according to the present invention comprises the steps of: - determining the present environment of the mobile device (10), - determining an address (DAC) of the second device in dependence on the present environment of the mobile device (10), and setting up the connection to the second device (20) using the address (DAC) determined in the previous step.

A method for establishing a connection between a mobile device and a second device

Description

5

The present invention relates to a method for establishing a connection between a mobile device and a second device both provided with a short range wireless communications module.

10 For connecting mobile electronic devices, like mobile telephones, car tele-
phones, portable computers (laptop), handheld computers and the like with
other mobile or stationary electronic devices different wireless communica-
tions technologies are used. For example infrared technology is used for con-
necting mobile phones and handheld computers with each other.

15

For wireless networking low power radio communications technologies have been developed like Apple-AirPort and Bluetooth.

For setting up a connection between two devices the calling or source device
20 has to know the device access code or address of the destination or device to
be called. Therefore, in case that an electronic device including a short range
radio communications module, in particular a Bluetooth module, has to set-
up a connection to another electronic device the device access code or ad-
dress of which is not known to the calling device, the source or calling device
25 has to discover which devices are in range and what their device addresses
are by means of an inquiry procedure. Thereafter, a desired destination or de-
vice to be called can be paged directly using the device access code of this de-
vice for setting up the connection.

30 Since in an inquiry state the calling or source device has to broadcast a general or dedicated inquiry access code at different hopping frequencies whereas the destination devices have to scan for an inquiry access code for a certain time at the different hopping frequencies, the inquiry procedure to acquire the destination's device address takes a rather long time. In particular, connection
35 set-up times of about 10 seconds are expected in real-live environments. However, this is unacceptable for a user for practical use.

1 Such set-up time adds an unacceptable latency to the connection establish-
ment. For example a low-value credit card transaction takes an average of 10
seconds, cash transactions only needs three seconds and automatic toll col-
lection needs only one second.

5

Summary of the invention

 The object of the present invention is to provide an improved method of estab-
lishing a connection between two electronic devices, in particular between a
10 mobile device and a second device that reduces the set-up time for establish-
ing the connection significantly.

 This object is achieved by the method according to claim 1. Advantageous de-
velopments and refinements of the present invention are described in the de-
15 pending claims.

 For establishing a connection from a connecting mobile device to a second de-
vice the present environment of the mobile device is determined for determin-
ing the address of the stationary device in dependence on the present envi-
20 ronment of the mobile device. Then, the connection to the second device is set
up using the address determined in the previous step. In this way it is
possible to reduce the set-up time significantly, since the lengthy inquiry
procedure can be skipped if the device address is known in advance so that
the procedure for setting up the connection can be performed directly.

25

 In particular, if a user is initiating a device search, a choice of potentially
connectable devices can be displayed immediately to the user. A simultaneous
inquiry and name discovery can optionally be used to dynamically correct and
extend the displayed choice of connectable devices. The user can immediately
30 try to connect to a selected device and thus reduce the setup time, which
usually includes the time consuming inquiry and name discovery procedure.
In case the current environment cannot be related to any device just the
usual device discovery is performed.

35 Thus, according to a preferred refinement of the present invention a step of
discovering which devices are available and what their addresses are is per-
formed in parallel with determining the address of the stationary device in de-

- 3 -

- 1 pendence on the present environment, and setting up the connection to the
second device upon selecting it by a user using the address discovered in the
discovering step.
- 5 Preferably, the second device is paged for setting up the connection by means
of the short range wireless communications module of the mobile device using
the address determined in dependence on the present environment of the mo-
bile device.
- 10 According to another advantageous refinement of the present invention the
address of the second device is determined by comparing environment data
according to the present environment of the mobile device with environment
data of devices stored in a memory of the mobile device together with the de-
vice address, wherein the environment data and the device address of a sec-
15 ond device were stored when the mobile device was connected to the second
device one or more times in the past.

In order to create an internal list of devices which are available in certain en-
vironments it is possible that the environment data of the mobile device being
20 connected to a second device is stored as environment data of the second de-
vice. The environment information stored for the address of a particular de-
vice can be improved during each connect to this device. For this purpose the
environment data of the second device to be stored in the mobile device can
be transmitted from the second device to the mobile device. In this case it is
25 possible to obtain more accurate position data of the stationary device.

According to another advantageous refinement of the present invention the
environment data and the device address of a certain second device are trans-
mitted and stored independently from a connection between the mobile device
30 and the second device. The list of devices and their corresponding positions
can, for example, be downloaded from a server.

To make it possible to connect a mobile device without a previous device dis-
covery to a second device, upon selecting a connect function an advantageous
35 refinement of the present invention is characterized in that in case that only
one device address is stored together with environment data corresponding to
the present environment of the mobile device a connection to this device is

- 1 set up automatically. If this fails, because the device is not available, the user interface notifies the user accordingly and/or starts device search and displays a list of truly available devices.
- 5 In addition, the mobile device can use the stored information to automatically connect to a connectable device without user interaction, e.g. when passing a toll station, if a connection to this device is set up automatically in case that one device address that is stored together with environment data corresponding to the present environment of the mobile device is marked as to be automatically connected to.
- 10

In case that more than one device addresses are stored together with environment data corresponding to the present environment of the mobile device, a list of those devices is output to the user for selecting that stationary device that the user wants the mobile device to be connected to by the wireless communications module. Here it is preferred that the devices are identified in a name format in the list output to the user.

15

According to another development of the present invention it is provided that the present environment of the mobile device is determined by means of the present position of the mobile device.

20

For determining the present position of the mobile device different methods can be used. However, according to a first development of the invention the present position of the mobile device is obtained by determining the position of the mobile device in a cellular radio communications network. This method, that e.g. evaluates the signals from one or more base stations, is of advantage in case that the mobile device is a mobile telephone or any other communications device using a cellular network.

25

According to a preferred embodiment of the present invention the current position of the mobile device is obtained by determining the position of the mobile device by means of a satellites based positioning system, in particular by means of the global positioning system.

30

35

- 5 -

1 Further, it is possible that the address of the second device that is a stationary device, is determined by calculating the device address from the position data using a predefined deterministic function.

5 This embodiment makes it possible to reduce the set-up time even for the first time connect to a stationary device or server. However, this embodiment of the invention requires a small addition to the corresponding communication standard. If a subrange of the device address space would be reserved for stationary devices, it is possible to predefine a deterministic function which can
10 be used to calculate the device address from the position data or at least to reduce the number of candidate addresses that come into question.

A further improvement of this invention is characterized in that in the present environment of the mobile device is determined by means of the current user
15 context.

According to this improvement the position or location of the mobile device is considered to be only one parameter for determining the environment of the mobile device according to the current user context. Other parameters of user
20 context sensed by the mobile device can include, but are not restricted to, the users identity, the time of day and how many times the user connected to a specific device, e. g. a stationary device in the past. The mobile device decides to add a device into the internal list of stored devices (or prompts the user to do so), when an internal algorithm discovers a sufficient match between user
25 context data, which were sensed during each instance the user connected to a particular device. This algorithm would typically employ pattern recognition techniques. The address of the device is stored with corresponding parameters derived from the context data sensed. The averaged position of the mobile device can be one of these parameters.

30 A device is considered to be a potential connectable device, if the current user context matches the parameters of a stored address according to a confidence criterion.

35 The advantage of this procedure is that not only a stationary device but also a non-stationary device can, for example, be found to be a potential connectable device when it is always used at the same time of day, even though it

1 changes locations like a device located in a vehicle used by its owner often at
the same time of the day.

Brief description of the drawings

5

The present invention will be described in more detail with reference to a preferred embodiment illustrated in the accompanying drawings.

Figure 1 shows a simplified schematic block diagram of a mobile device and a
10 stationary device; and

Figure 2 is a simplified flow chart of the inventive method.

Detailed description of preferred embodiments of the invention

15

As shown in Figure 1 a mobile device 10, e.g. a mobile telephone, comprises a short range wireless communications module 11, e.g. a low power radio frequency communications module that operates in accordance with the Bluetooth standard. The short range wireless communications module, that is
20 called in the following description Bluetooth module 11, is connected to a central processing unit 12 that is controlling all activities of the mobile device 10. The central processing unit 12 comprises a memory (MEM) 13 for storing device address data together with environment data, in particular with position data. These devices are assumed to be potentially connectable devices, be-
25 cause they should be close enough to be connected by the mobile device 10, if the mobile device is in the same environment, in particular at the same location where these devices are supposed to be.

A user interface 14 for controlling the mobile device 10 comprises a keypad
30 15 and a display 16. However, other and/or additional input means like turn-push buttons, jog-dials or the like as well as voice input means can be provided, too. Further, a loudspeaker can be used for outputting information to the user instead or preferably in addition to the display 16.

35 Further, a positioning module 17 is provided to determine the current position of the mobile device. The positioning module can be formed, e.g. by a GPS module or by any other positioning module. In particular, it is also possi-

1 ble to use positioning information of a cellular radio telecommunications network to determine the actual position of the mobile device 10 in the positioning module 17.

5 Output 18 of the central processing unit 12 indicates connections to other modules of the mobile device like SIM card, wide range transceiver for use in a cellular radio communications network and the like.

10 A second device located in a certain environment, e.g. a stationary device 20 comprises a short range wireless communications module 21 that is able to communicate with that of the mobile device 10. Consequently, for ease of description the short range wireless communications module of the stationary device will be called Bluetooth module 21 in the following description without restricting the present invention to this standard.

15 The Bluetooth module 21 of the stationary device 20 is connected to a stationary server 22 that can be for example a payment device at a till, an automatic toll collection device, a vending machine, a point-of-interest server and any other kind of stationary servers.

20 If a user of a mobile device 10 adapted to work in accordance with the present invention wants the mobile device to be connected to a stationary device 20, e.g. a vending machine or a point-of-interest information server by means of the Bluetooth module 21, the mobile device 10 first obtains its current position from the positioning module 17 in step S10 as shown in Figure 2. Then,
25 it checks whether or not a device address, i.e. the address of the vending machine or the point-of-interest information server is stored together with the actual position of the mobile device 10 in step S20 for determining addresses DAC of devices in accordance with the current position of the mobile device. If
30 there is a device address stored together with the current position or with a position closely related with the current position this address is assumed to be the device address of the stationary device 20 in question.

35 Since positioning data for one and the same location might differ from time to time due to tolerances it is of advantage to regard stored position data as equal to current position data if the difference between the stored data and the actual data is less than a predefined threshold value.

- 1 If only one address DAC of one stationary device was successfully determined
in step S20 this address can be used for directly paging the stationary device
in step S50 if no selection procedure is required in step S40.
- 5 However, if no device address is stored in the mobile device, i.e. that it is the
first time that the mobile device 10 should be connected to a specific station-
ary device 20, then the Bluetooth module 11 has to perform the usual proce-
dure for establishing a connection, i.e. to perform an inquiry procedure to
discover which units or devices are in range and what their device addresses
10 and clocks are in step S30. Thereafter, the paging procedure for establishing
an actual connection is performed in steps S40 and S50.

Although it is possible that the steps S20 and S30 are performed succes-
sively, it is preferred that these steps are carried out simultaneously. There-
15 fore, if a user of a mobile device wants his/her device to be connected to a de-
vice she/he activates a search mode. There upon it is detected in the mobile
device 10 that there are stationary devices 20 stored in a respective memory
13 so that these devices can be immediately displayed to the user in a man-
ner that indicates that these devices are potentially connectable devices. Si-
20 multaneously the usual inquiry procedure is started and other devices found
are displayed in the same display one by one in a manner indicating that
these devices are available. If one of the potentially connectable devices are
actually found by inquiry their display style is changed to indicate that these
devices are connectable devices actually available.

25 In case that the mobile device 10 has to be connected to a specific stationary
device 20 at the first time, the user can be prompted for deciding whether the
current position data and address of the actual stationary device 20 should
be stored or not. Alternatively, the mobile device 10 may assume by default
30 that every device is stationary and only if this assumption is observed to be
false in subsequent connection attempts, such device are removed.

Instead of using the position of the mobile device 10 determined by the posi-
tioning module 17 for storing it together with the device address of the sta-
35 tionary device 20 it is also possible to transmit position data from the station-
ary device 20 to the mobile device 10 so that positioning data of higher accu-

1 racy can be used in future for determining the device address of the stationary device 20.

5 In case that more than one stationary device 20 provided with a corresponding Bluetooth module 21 exist at the current position of the mobile device 10 so that it is not clear to the mobile device 10 to which of the stationary devices 20 a connection is needed, a selecting procedure is performed in step S40, i.e. the user is asked to select one of the available stationary devices 20. To assist the user in selecting a device wanted a choice of potentially connect-
10 able devices, i.e. a list of such devices is output to him/her which preferably identifies the potentially available stationary devices 20 in a user friendly name format.

After selecting the desired device, i.e. after deciding which device address
15 code DAC have to be used, the paging procedure to set-up the desired connection is performed in the usual way in step S50.

For determining a device address in step S20 it is also possible to calculate a device address from the current position data by means of a deterministic
20 function if such a possibility is provided in the communications standard used.

According to the present invention it is also possible to transmit the address and location information to the mobile device 10, without knowing or connect-
25 ing the stationary devices 20 in advance. In case, that a user having a mobile device 10 adapted according to the present invention visits an exhibition consisting of different pavillons, some or each of which have/has stationary devices 20 adapted according to the present invention attached to them for informing visitors (so called Bluetooth information kiosks), it is possible that
30 upon entering the exhibition premises, the user downloads a list of device addresses together with their location information. An application in the mobile device 10, e.g. a mobile phone, constantly monitors the user's position and once he/she comes close to a pavillion it automatically starts paging for the corresponding info kiosk and - if found - displays the info page of this pavil-
35 lion (probably the user's device beeps and displays a message "display german pavillion page?" where the user has to "accept" or "cancel"). In this case, the position data and the device address DAC of the stationary device 20 are

1 transmitted and stored independently from a connection between the mobile device 10 and the stationary device 20.

5 In addition it is possible that the mobile device 10 constantly pages for potentially connectable devices in the background to verify whether they are actually connectable and thus improve the initial list of devices displayed to a user whenever initiating a device search. The advantage of this procedure is that the Bluetooth module 11 is only active, while potentially connectable devices are supposed to be in proximity of the mobile device 10. Consequently,
10 this procedure consumes much less power than a permanent inquiry procedure running in background all the time.

Furthermore, in order to create an internal list of devices which are available in certain environments, a decision has to be made either by the mobile device
15 10 or by the user whether the address and environment data of a second device shall be stored in the memory of the mobile device 10. The user can decide to store the environment and address data of a second device 20 together with some attributes, like device name, link key and the like. This can be a menu option or context sensitive dialog displayed by the mobile device 10,
20 preferably in timely context of a connection to the second device 20.

The mobile device can decide to automatically store the environment and address data together with some attributes, depending on several confidence criteria. These criteria can include the number of instances, the user connected
25 to this device in the past and the deviation of measured location of this device in each of these instances. Further, depending on confidence criteria a context sensitive dialog is displayed or not to the user on whether the storage of the device is desired.

30 Although, the present invention has been describe mainly in connection with stationary devices, i.e. devices that does not change its location, wherein position data are used to determine the environment of these devices, the present invention is not restricted thereto. In particular it is possible to determine the environment of a second device form other parameters of a user's
35 context like the users name, time of the day, the number connections to a certain device at a certain time of the day and the like.

1

Claims

1. A method for establishing a connection from a mobile device (10) to a second device (20) both provided with a short range wireless communications module (11, 21), comprising the steps of:

- determining the present environment of the mobile device (10),
- determining an address (DAC) of the second device in dependence on the present environment of the mobile device (10), and
- setting up the connection to the second device (20) using the address (DAC) determined in the previous step.

2. The method as claimed in claim 1, characterized by the steps of:

- discovering which devices (20) are available and what their addresses are in parallel with determining the address (DAC) of the stationary device in dependence on the present environment, and
- setting up the connection to the second device (20) upon selecting it by a user using the address discovered in the discovering step.

3. The method as claimed in claim 1 or 2, characterized in that for setting up the connection the second device (20) is paged by means of the short range wireless communications module (11) of the mobile device (10) using the address determined in dependence on the present environment of the mobile device (10).

4. The method as claimed in claim 1, 2 or 3, characterized in that the address of the second device is determined by comparing environment data according to the present environment of the mobile device (10) with environment data of devices stored in a memory (13) of the mobile device (10) together with the device address (DAC).

30

5. The method as claimed in claim 4, characterized in that the environment data and the device address (DAC) of a second device (20) are stored when the mobile device (10) is connected to the second device (20).

6. The method according to claim 4 or 5, characterized in that the environment data of the mobile device (10) being connected to a second device (20) is stored as environment data of the second device (20).

- 1 7. The method as claimed in claim 4 or 5, characterized in that the environment data of the second device (20) to be stored in the mobile device (10) is transmitted from the second device (20) to the mobile device (10).
- 5 8. The method as claimed in claim 4, characterized in that the environment data and the device address (DAC) of the second device (20) are transmitted and stored independently from a connection between the mobile device (10) and the second device (20).
- 10 9. The method as claimed in any one of the preceding claims, characterized in that in case that only one device address (DAC) is stored together with environment data corresponding to the present environment of the mobile device (10) a connection to this device (20) is set up automatically.
- 15 10. The method as claimed in any one of the preceding claims, characterized in that in case that one device address (DAC) that is stored together with environment data corresponding to the present environment of the mobile device (10) is marked as to be automatically connected to, a connection to this device (20) is set up automatically without user interaction.
- 20 11. The method as claimed in any one of the preceding claims, characterized in that in case that more than one device addresses (DAC) are stored together with environment data corresponding to the present environment of the mobile device (10), a list of those devices is output to the user for selecting that
- 25 stationary device that the user wants the mobile device to be connected to by the wireless communications module (11).
- 30 12. The method as claimed in claim 11, characterized in that the devices (20) are identified in a name format in the list output to the user.
- 35 13. The method as claimed in any one of the preceding claims, characterized in that the present environment of the mobile device (10) is determined by means of the present position of the mobile device (10).
14. The method as claimed in claim 13, characterized in that the present position of the mobile device (10) is obtained by determining the position of the mobile device (10) in a cellular radio communications network.

1 15. The method as claimed in claim 13, characterized in that the present position of the mobile device (10) is obtained by determining the position of the mobile device (10) by means of a satellites based positioning system, in particular by means of the global positioning system (GPS).

5

16. The method as claimed in claim 13, characterized in that the address of the second device is determined by calculating the device address (DAC) from the position data of the present position of the mobile device (10) using a pre-defined deterministic function.

10

17. The method as claimed in any one of the preceding claims, characterized in that in the present environment of the mobile device (10) is determined by means of the current user context.

15

20

25

30

35

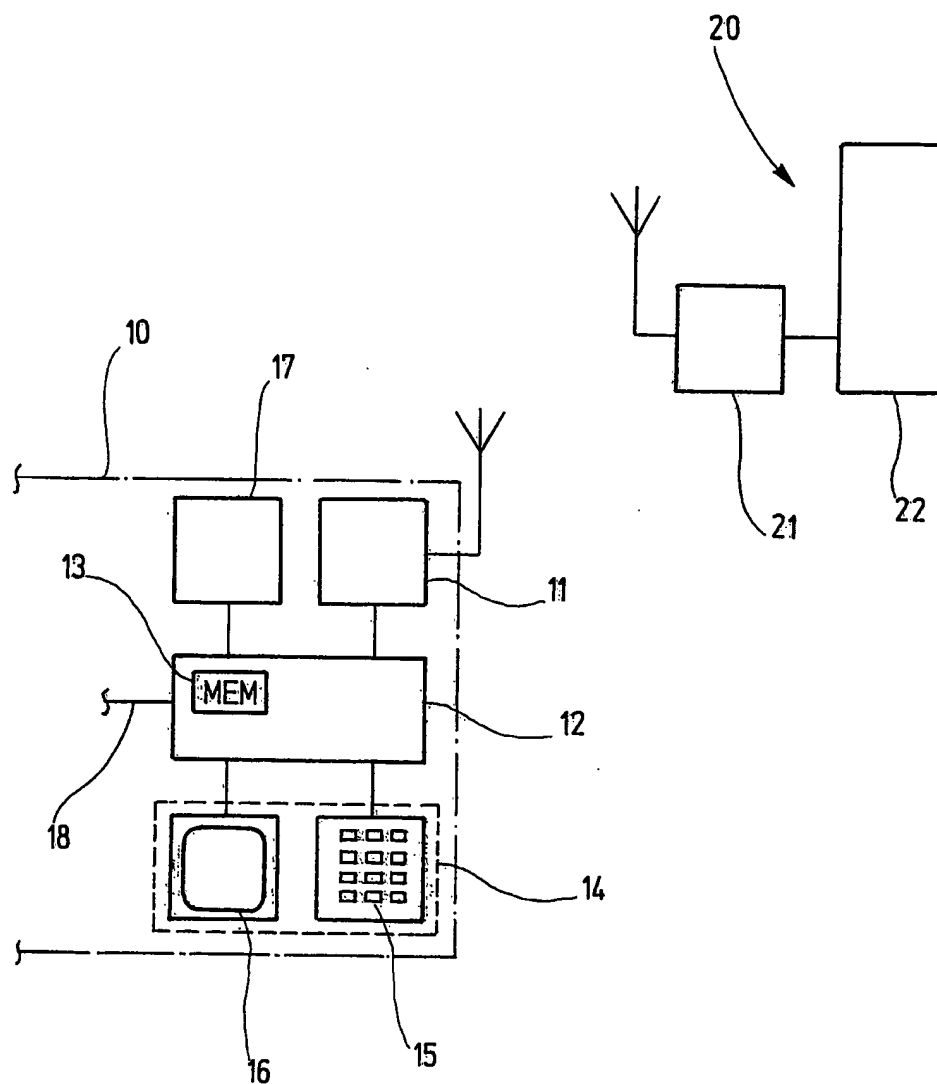


Fig.1

2 / 2

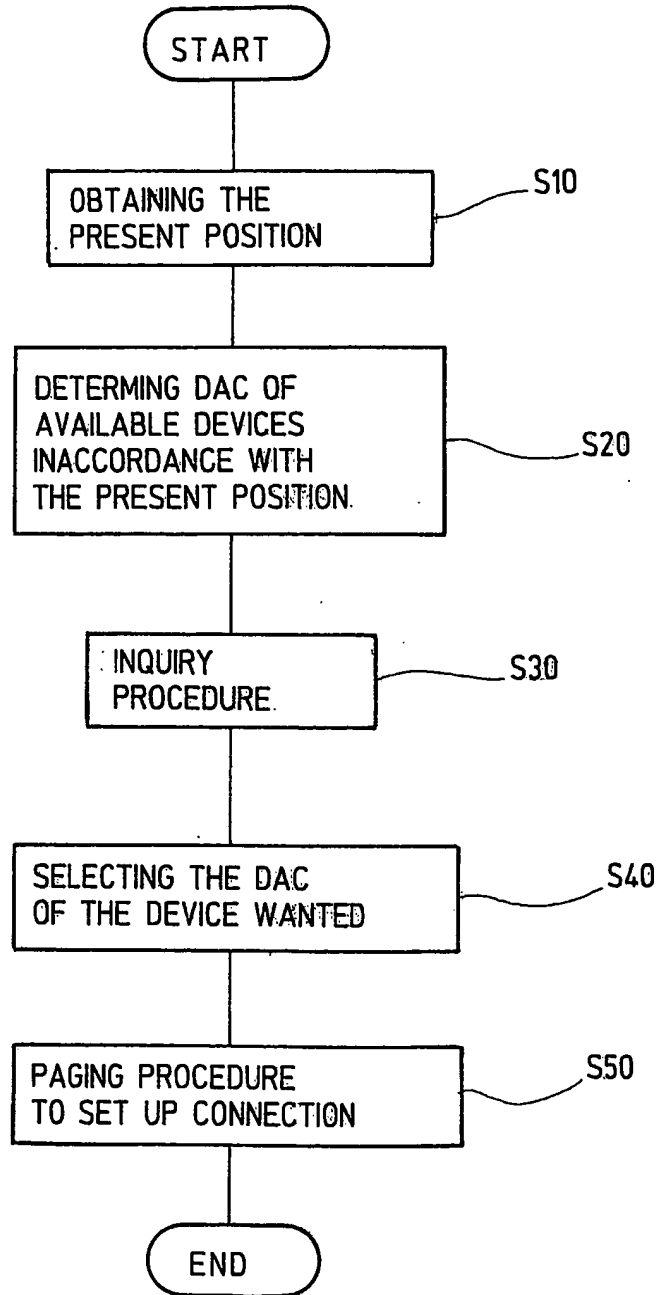


Fig.2

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/ib 02/02519

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 74011 A (PSION PLC ;WOLOVITZ LIONEL (GB)) 4 October 2001 (2001-10-04) claims ----	1-6, 8-11, 13-15,17
X	EP 1 024 628 A (IBM) 2 August 2000 (2000-08-02) page 6, line 17 -page 11, line 43 claims ----	1-4,7,8, 11-13
X	WO 02 35865 A (BEART PILGRIM ;BIOMOTIX LTD (GB)) 2 May 2002 (2002-05-02) page 2, line 11 -page 9, line 21 ----	1-3,17
X	WO 02 09362 A (PHILLIPPS JOHN QUENTIN) 31 January 2002 (2002-01-31) page 3, line 4 -page 5, line 10 ----- -/-	1-3,17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the International search

13 February 2003

Date of mailing of the International search report

24/02/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Roberti, V

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/15 02/02519

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 176 840 A (MICROSOFT CORP) 30 January 2002 (2002-01-30) column 5, line 49 -column 22, line 37 -----	1-17
A	HAARTSEN J: "BLUETOOTH - THE UNIVERSAL RADIO INTERFACE FOR AD HOC, WIRELESS CONNECTIVITY" ON - ERICSSON REVIEW, ERICSSON. STOCKHOLM, SE, no. 3, 1998, pages 110-117, XP000783249 ISSN: 0014-0171 the whole document -----	1-17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB 02/02519

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0174011	A	04-10-2001	WO 0174011 A1	04-10-2001
			GB 2360914 A	03-10-2001
EP 1024628	A	02-08-2000	EP 1024628 A1	02-08-2000
			CN 1262565 A	09-08-2000
			JP 2001045029 A	16-02-2001
			KR 2000053577 A	25-08-2000
WO 0235865	A	02-05-2002	GB 2368498 A	01-05-2002
			AU 1244202 A	06-05-2002
			WO 0235865 A1	02-05-2002
WO 0209362	A	31-01-2002	GB 2365263 A	13-02-2002
			AU 6619101 A	05-02-2002
			WO 0209362 A1	31-01-2002
EP 1176840	A	30-01-2002	EP 1176840 A1	30-01-2002